



1. Chain 8x25,4 (1“) with/without Trolleys for poultry processing



In 50m-lengths.

Styles:

Electro galvanized or stainless steel (AISI 316 Ti) – incl. test certificate.

Trolley layout:

Definable – e.g. 6“ or 8“ (links) distances.

Assembling of additional elements by wagework possible.

Special editions on request.

Connecting links as well:

- Hardened steel and electrogalvanized
- Stainless steel




2. Refurbishing of used slaughterchain-systems

Disassembling and refurbishing of used trolleys followed by assembling of these trolleys with new chains.

Refurbished Plastic Trolleys

REFURBISHING:

Think of the environment.

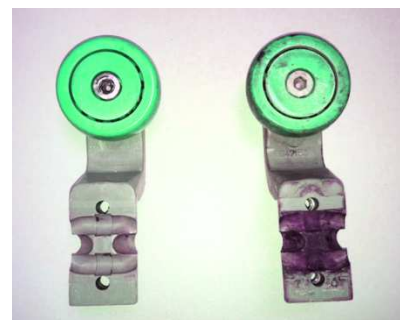

afterwards

previously

Technical changes subject to alterations. All specifications without engagement.



Chain 8x25,4 (1“) with/without Trolleys for poultry processing



In 50m-lengths.

Measures / dimensions:

Diameter d [mm]:	8,0 +/-0,3
Diameter welding [mm]:	max. 8,6
Pitch t [mm]:	25,4 +0,3 / -0,2
True to gauge 11 x t [mm]:	279,4 +1,12 / -0,42
Inner width b1 [mm]:	min. 9,3
Outside width b2 [mm]:	max. 26,2



Mechanical properties:

Proof force PK min. [kN]:	20
Breaking force BK min. [kN]:	40
Elongation E min. [%]:	2
Surface hardness [HV]:	730-830
Case hardening depth CHD [mm]:	0,32 – 0,48

Style:

- Mn-steel, electro galvanised, blue chromated
- Stainless steel (1.4571 / 1.4404 / 1.4310)

Stamping: production code

With joining links if desired.

Technical changes subject to alterations. All specifications without engagement.